

Best Available Copy





INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7: A61M 25/00, A61B 17/22

(11) International Publication Number:

WO 00/44428

(43) International Publication Date:

3 August 2000 (03.08.00)

(21) International Application Number:

PCT/IE00/00011

A1

(22) International Filing Date:

28 January 2000 (28.01.00)

(30) Priority Data:

990058

28 January 1999 (28.01.99)

ΙE

(71) Applicant (for all designated States except US): ADAM SPENCE EUROPE LIMITED [IE/IE]: I Earlsfort Centre, Hatch Street, Dublin 2 (IE).

(72) Inventors; and


- (75) Inventors/Applicants (for US only): MULHOLLAND, Patrick [IE/IE]; Ladestown, Mullingar, County Westmeath (IE). O'CARROLL, Gerard [IE/IE]; Castlebaldwin, County Sligo (IE). CONLON, Dominic [IE/IE]; Geevagh, County Sligo (IE).
- (74) Agents: O'BRIEN, John, A. et al.; John A O'Brien & Associates, Duncairn House, 3rd floor, 14 Carysfort Avenue, Blackrock, County Dublin (IE).

(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published

With international search report.

(54) Title: CATHETER WITH AN EXPANDABLE END PORTION

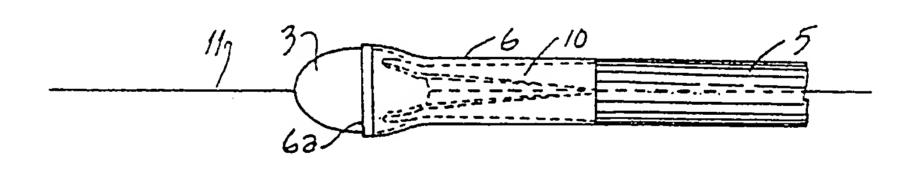

(57) Abstract

A catheter (2) is used in medical applications, for example for the retrieval of a sample from a patient or the insertion or retrieval of medical devices such as filters, stents (3) to and from the patient. The catheter (2) includes an expandable tip (6) at a leading portion of a catheter tube portion (5). This expandable tip (6) can retrieve or deliver samples, medical devices, etc. (3), which are slightly larger than the dimensions of a main catheter tube (5) inserted into the patient. The expandable tip (6) can also include extension members (10) which provide axial support to the expandable tip (6) but which still allow expansion in the radial direction.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LÜ	Luxembourg	SN	Senegal
ΑÜ	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
ΑZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GΕ	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistán
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	1E	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	ſL	israel	MR	Mauritania	ľ.C	Uganda
BY	Belarus	ıs	fceland	MW	Malawi	US	United States of America
CA	Canada	IT	ftaly	MX	Mexico	ĽZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
ÇG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand	•	
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	ΚZ	Kazaksian	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
23	Estonia	LR	Liberia	SC	Singapore		

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7: (11) International Publication Number: WO 00/44428 A61M 25/00, A61B 17/22 A2 (43) International Publication Date: 3 August 2000 (03.03.00) (21) International Application Number: PCT/tE00/00011 (81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR. BY. CA. CH. CN. CR. CU. CZ. DE. DK. DM. EE. (22) International Filing Date: 28 January 2000 (28,01,00) ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA. MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, (30) Priority Data: SD. SE. SG. SI. SK. SL. TJ. TM. TR. TT. TZ. UA. UG. 990058 23 January 1999 (28.01.99) US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, IE LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, (71) Applicant (for all designated States except US): ADAM BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, SPENCE EUROPE LIMITED [III/IE]: 1 Earlsfort Centre. MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, Hatch Street, Dublin 2 (IE). GA, GN, GW, ML, MR, NE, SN, TD, TG). (72) Inventors; and (75) Inventors/Applicants (for US only): MULHOLLAND, Patrick Published [IE'IE]; Ladestown, Mullingar, County Westmeath (IE). With international search report. O'CARROLL, Gerard [IE/IE]; Castlebaldwin, County Sligo (IE). CONLON, Dominic [IE/IE]; Geevagh, County Sligo (IE). (74) Agents: O'BRIEN, John, A. et al.; John A O'Brien & Associates, Duncaim House, 3rd floor, 14 Carysfort Avenue, Blackrock, County Dublin (IE). (54) Title: CATHETER WITH AN EXPANDABLE END PORTION (57) Abstract A catheter (2) is used in medical applications, for example for the retrieval of a sample from a patient or the insertion or retrieval of medical devices such as filters, stents (3) to and from the patient. The catheter (2) includes an expandable tip (6) at a leading portion of a catheter tube portion (5). This expandable tip (6) can retrieve or deliver samples, medical devices, etc. (3), which are slightly larger than the dimensions of a main catheter tube (5) inserted into the patient. The expandable tip (6) can also include extension members (10) which

provide axial support to the expandable tip (6) but which still allow expansion in the radial direction.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	F.S	Spain	1.5	Lesotho
AM	Armenia	FI	Finland	l,T	Lithuania
AT	Austria	FR	France	1.0	Luxembourg
ΛÜ	Australia	GA	Gahon	LV	Latvia
AZ	Azerbaijan	GB	United Kingdoni	MC	Monaco
BA	Bosnia and Herzegovina	GΕ	Georgia	MD	Republic of Moldova
BB	Barbados	CH	Ghana	MG	Madagascar
BE	Belgium	GN	Guinea	MK	The former Yugoslav
BF	Burkina Faso	GR	Greece		Republic of Macedonia
BG	Bulgaria	HÜ	Hungary	ML	Mali
BJ	Benin	EE.	freland	MN	Mongolia
BR	Brazil	Ħ,	Israel	MR	Mauritania
BY	Belarus	IS	Iceland	MW	Malawi
ÇA	Canada	1.1	Italy	MX	Mexico
CF	Central African Republic	JP	Iapan	NE	
CC	Congo	KE	Kenya	NL	Niger Nathantanda
CH	Switzerland	KG	Kyrgyastan	NO NO	Notherlands
CI	Côte d'Ivoire	KP	Democratic People's		Norway Norway
CM	Cameroon	•••	Republic of Korea	NZ	New Zealand
CN	China	KR	Republic of Korea	PL.	Polind
CU	Cubu	KZ	Kazaksian	PT	Portugal
CZ	Czech Republic	LC		KO	Romania
DΕ	Germany		Saint Lucia	RU	Russian Federation
	•	Li	Liechtenstein	SD	Sudan
DK	Denmark	LK	Sri Lanka	SE	Sweden
EE	Estonia	LR	Liberia	SG	Singapore

WO 00/44428 PCT/IE00/00011

- [-

CATHETER WITH AN EXPANDABLE END PORTION

Background of the Invention

5 Field of the Invention

The present invention is directed to a catheter, for example a retrieval or delivery catheter used in medical applications, which has an expandable end portion.

10 <u>Discussion of the Background</u>

Catheters are well known medical devices used to facilitate various medical procedures, such as diagnostic or delivery procedures. Catheter tubes are inserted into a body of a patient for various medical procedures. For example, a catheter may be used in performing diagnostic procedures such as removing a sample from a body site of a patient. The catheter tube is used in this situation as the delivery vehicle for the medical instrument which removes the sample. Further, sophisticated medical implant devices, such as filters and stents, can be delivered and retrieved into and from the body site of the patient using a catheter.

20

25

15

Generally, a catheter has a tube portion which is relatively stiff in both axial and radial directions to allow proper placement of the catheter in the patient's body, but which may be fitted with a distal soft tip which first contacts tissues in the patient. The soft tip is provided to minimise discomfort for the patient when the catheter is inserted into the patient. For example, WO-A-9808562 A describes a catheter with an insert moulded catheter tip. However, there are constraints on the use of such catheters in that such catheters can only be relatively small sized, and thus can only be used to retrieve and deliver relatively small samples and medical devices.

Summary of the Invention

Accordingly, one object of the present invention is to provide a novel catheter which can be used to retrieve larger objects and deliver and retrieve larger medical devices than in the background art.

A further object of the present invention is to provide a novel catheter which can accommodate an article with a slightly larger dimension than that of a main catheter tube itself.

10

15

5

The novel catheter of the present invention achieves these and other objects by including a portion near a distal tip end which is expandable in size in a radial direction to accommodate larger size samples or medical devices. The catheter includes reinforcement means to enhance the axial strength of the tip while facilitating radial expansion of the tip to accommodate an article.

As a further feature, the novel catheter of the present invention can further include reinforcing portions in the expandable portion to enhance strength in the axial direction, while still allowing expansion in the radial direction.

20

25

30

Most preferably the tip is a soft tip of flexible material.

In a preferred embodiment the reinforcement means comprises an extension means extending from the catheter tube portion. Preferably the tip includes a free distal end and the extension means terminates at a position that is axially spaced back from the free end of the tip.

In one embodiment of the invention the extension means comprises at least one extension member extending from said catheter tube portion into said expandable tip.

Preferably the extension means comprises a plurality of extension members extending from said catheter tube portion into said expandable tip. To provide a gradual change in the axial reinforcement preferably said at least one extension member is tapered toward a leading portion of said expandable tip.

5

Axial reinforcement and radial expansion is facilitated particularly when said plurality of extension members are equi-spaced in the direction of said expandable member.

.

(z) .

Preferably said plurality of extension members are tapered toward a leading portion of said expandable member.

For ease of manufacture while providing the desired reinforcement characteristics preferably the number of said plurality of extension members is four.

15

To provide atraumatic transition to the soft tip preferably said at least one extension member includes a radiused tip. Ideally, said plurality of extension members each include a radiused tip.

20

In addition, for ease of passage of an article into or out of the tip preferably the tip has a free end which is rounded.

In a preferred embodiment the tip has a free end which is rounded for ease of passage of the tip through a body passageway such as the vasculature.

25

Preferably the tip comprises a tubular sleeve of flexible material. For ease of manufacture and to provide a smooth transition preferably the sleeve is attached to the catheter tube portion by heating.

(**

Ideally to provide a smooth transition the tip has an outer diameter which is approximately the same dimension as the outer diameter of the catheter tube portion.

In one aspect the invention provides a retrieval catheter for retrieving an article such as a filter comprising a catheter tube portion and a tip extending axially from the catheter tube portion, the tip being flexible relative to the catheter tube portion, characterised in that the catheter includes reinforcement means to enhance the axial strength of the tip while facilitating radial expansion of the tip to accommodate an article in the tip. Usually the article to be retrieved has a larger dimension then that of the normal internal dimension of the tip.

In one embodiment of the invention the tip is movable from a delivery configuration in which the outer diameter of the tip is approximately of the same dimension as the outer diameter of the catheter portion to which it is attached, to an expandable position as an article is received in the tip.

For ease of use, preferably the tip is progressively movable to the expanded position in response to receiving an article in the tip.

20

15

The invention also provides a catheter tube portion having a tip extending axially from the catheter tube portion, in which the catheter tube portion includes reinforcement means to enhance the axial strength of the tip while facilitating radial expansion of the tip to accommodate an article in the tip.

25

30

Brief Description of the Drawings

The invention will be more clearly understood by reference to the following detailed description when considered in conjunction with the accompanying drawings, wherein:

Fig. 1 is an overall view of the novel catheter of the present invention used with an introducer;

Fig. 2 shows a more detailed view of a tip portion of the catheter of Fig. 1;

5

Fig. 3(a) and 3(b) are cross sectional views of the tip portion of the catheter on the lines IIIa-IIIa and IIIb-IIIb respectively of Fig. 2;

10

Fig. 4(a) is an exploded view of the tip portion of the catheter of the present invention;

Fig. 4(b) is a cross sectional view on an enlarged scale of a distal end of the tip portion of the catheter;

15

Figs. 5(a) to 5(d) are diagrammatic views showing one operation of the catheter; and

Fig. 6 is a scale drawing, as an example, of an actual implementation of the novel catheter of the present invention.

20

25

30

Description of the Preferred Embodiments

Referring to the drawings, wherein like reference numerals designate identical or corresponding parts throughout the several views, and more particularly to Fig. 1 thereof, the overall device 1 is an introducer, e.g. a percutaneous introducer, with a catheter portion 2. Fig. 1 illustrates the catheter portion 2 according to the present invention, for example a retrieval catheter, which is attached to an introducer having a hub portion 20 and a side lead tube 21 which leads into the hub portion 20. A medical instrument to be inserted into a patient is placed through the hub portion 20. This medical instrument placed through the hub portion 20 may be, as examples, a retrieval element to retrieve a sample, a clot or

10

15

20

25

30

previously inserted medical device such as a stent or filter from a patient's body, or a delivery element to deliver a medical device to a patient's body.

The catheter 2 may also be used to deliver or retrieve another catheter. The catheter portion 2 of Fig. 1 includes a catheter tube portion 5 which is relatively rigid in both the axial and radial directions to facilitate delivery of the catheter tube portion 5 through a lumen. That is, the catheter tube portion 5 is a portion actually inserted into the patient.

The catheter portion 2 of the present invention further includes an expandable soft tip portion 6 with a distal tip area 6a. The expandable tip 6 is in the form of a sleeve which has an outer diameter which is nominally the same as the outer diameter of the catheter tube portion 5. The distal soft tip area 6a initially contacts tissues of the patient as the catheter tube portion 5 is inserted into the patient, and minimises discomfort in the patient by virtue of its softness. The expandable soft tip portion 6 is flexible in both the axial and radial directions, and particularly is expandable in the radial direction. This expandable tip portion 6 may be made of a radiopaque or non-radiopaque material. Examples of materials for the expandable tip portion 6 include PEBA (polyether block polyamide), nylon, polyurethane or polyethylene.

Figs. 2, 3 and 4 provide further details of the catheter portion 2 including the expandable soft portion 6. The catheter portion 2 includes extension legs 10 formed inside of the expandable portion 6. That is, the catheter tube portion 5 is processed to form extension legs 10 at the leading edge of the catheter tube portion 5. The extension legs 10 can be formed in the catheter tube portion 5 by, for example, cutting catheter tube portion 5 using a punch and die set with a profile to achieve a desired taper in the extension legs 10. The extension legs 10 provide a reinforcement in the axial direction of the expandable portion 6 over their length to enhance the strength of expandable portion 6 in the axial direction, while still providing expansion in the radial direction. In the embodiment shown

- 7 -

in Figs. 2-4 four extension legs 10 are equi-spaced around the expandable portion 6 to provide support in the axial direction and uniform flexibility in the radial direction. These extension legs 10 are tapered towards the free end of the expandable portion 6 to provide a gradually increasing controlled axial flexibility to allow the catheter tube portion 5 to be comfortably guided into the patient.

10

5

The expandable portion 6, which as noted above can be formed of a radiopaque or non-radiopaque material such as PEBA, nylon, polyurethane or polyethylene, can be secured to the main catheter tube portion 5 by heating such as by RF (radio frequency) welding the expandable portion 6 to the main catheter tube portion 5. On heating, the extension legs 10 merge into the expandable portion 6.

15

It will be noted that the expandable soft portion 6 extends distally beyond the axial extent of the extension legs 10 to provide the distal soft tip 6a which is not axially reinforced. The soft tip 6a has a free end that is rounded internally at 23 for ease of passage of an article 3, and is also rounded externally at 24 for ease of atraumatic passage of the tip through a body passageway such as the vasculature.

20

Fig. 6 shows an actual implementation of the catheter portion 2 in the present invention. Element 12 shows distal tips of the extension legs 10, and element 13 shows proximal tips of the extension legs 10, which tips 12, 13 can be radiused. That is, the tips 12, 13 of the extension legs 10 can be rounded to prevent creating a sharp edge, and thereby generating a weak point in the soft tip area 6a or the expandable portion 6. Generating a weak point in the expandable portion 6 could result in a tear in the soft tip, and if the tips 12, 13 of the extension legs 10 are radiused such a weak point and resulting tear may be prevented. Typical dimensions in millimetres are as follows:

25

 l_1 : 18.00 ± 1.50 l_2 : 15.00 ± 0.25

30

: 0.70

10

15

20

25

•

-8-

Internal d

 2.03 ± 0.04

Tip radius

R 0.15 @ 90" intervals

Figs. 5(a) to 5 (d) show the catheter 2 of the present invention in use as a retrieval catheter as an example of one use of catheter 2. As shown in Fig. 5(a), an article 3 for retrieval, for example a sample or clot within a patient or a medical device such as a stent or filter previously inserted in the patient, is approached by the catheter tube portion 5. A retrieval device may be inserted in the introducer 1 and through the hub 20, through the catheter tube portion 5, and then through the expandable portion 6, to contact the sample 3. Alternatively the article 3, especially when in the form of a medical device such as a filter, may be attached. on introduction, to a guide wire 11 as shown in Fig. 5(a). Th retrieval device then retrieves the article 3 into the expandable portion 6 of the catheter portion 2 as shown in Figs. 5(b) to 5(d). The article 3 is first pulled back by pulling the guide wire and engages the distal tip 6a which is not reinforced and expands radially to receive the proximal end of the article 3. As the article 3 is drawn further back into the expandable portion 6 the expandable portion 6 expands radially outwardly. However the expandable portion 6 is gradually axially reinforced by the extension legs 10 to smooth the capture of the article 3. This expandable portion 6 extending axially from the catheter tube portion 5 is flexible relative to the catheter tube portion 5. The catheter portion includes reinforcement means to enhance the axial strength of the expandable portion 6 while facilitating radial expansion of the tip to accommodate an article 3 in the expandable portion 6. The tip expands to accommodate the article 3. As noted above, the extension legs 10 provide some support in the axial direction, but still allow expansion in the radial direction, to thereby allow expandable portion 6 to expand to allow the article 3 to be drawn into the expandable portion 6. The catheter tube portion 5 can then be removed from the patient with the article 3 housed therein.

In this way, this operation in the present invention allows a sample or device 3 which may be larger than the catheter tube portion 5 to be retrieved from a

patient. A medical device which may be larger than the catheter tube portion 5 can also be delivered to a patient in a similar manner.

Obviously, numerous modifications and variations of the present invention are possible in light of the above teachings. It is therefore to be understood that within the scope of the appended claims the present invention may be practised otherwise than as specifically disclosed therein.

CLAIMS

5

- A catheter comprising a catheter tube portion and a tip extending axially from the catheter tube portion, the tip being flexible relative to the catheter tube portion, characterised in that the catheter includes reinforcement means to enhance the axial strength of the tip while facilitating radial expansion of the tip to accommodate an article in the tip.
- 2. A catheter as claimed in claim 1 wherein the tip is a soft tip of flexible material.
 - 3. A catheter as claimed in claim 1 or 2 wherein the reinforcement means comprises an extension means extending from the catheter tube portion.
- A catheter as claimed in claim 3 wherein the tip includes a free distal end and the extension means terminates at a position that is axially spaced back from the free end of the tip.
- A catheter as claimed in claim 3 or 4 wherein the extension means comprises at least one extension member extending from said catheter tube portion into said expandable tip.
 - 6. A catheter as claimed in any of claims 3 to 5 wherein the extension means comprises a plurality of extension members extending from said catheter tube portion into said expandable tip.
 - 7. A catheter as claimed in claim 6 wherein said at least one extension member is tapered toward a leading portion of said expandable tip.
- 30 8. A catheter as claimed in claim 6 or 7 wherein said plurality of extension members are equi-spaced in the direction of said expandable tip.

9. A catheter as claimed in any of claims 6 to 8 wherein said plurality of extension members are tapered toward a leading portion of said expandable tip.

5


- 10. A catheter as claimed in any of claims 6 to 9 wherein the number of said plurality of extension members is four.
- 11. A catheter as claimed in any of claims 6 to 10 wherein said at least one extension member includes a radiused tip.
 - 12. A catheter as claimed in claim 9 wherein said plurality of extension members each include a radiused tip.
- 13. A catheter as claimed in any preceding claim wherein the tip has a free end which is rounded for ease of passage of an article.
 - 14. A catheter as claimed in any preceding claim wherein the tip has a free end which is rounded for ease of passage of the tip through the vasculature.

20


- 15. A catheter as claimed in any preceding claim wherein the tip comprises a tubular sleeve of flexible material.
- 16. A catheter as claimed in claim 15 wherein the sleeve is attached to the catheter tube portion by heating.
 - 17. A catheter as claimed in any preceding claim wherein the tip has an outer diameter which is approximately the same dimension as the outer diameter of the catheter tube portion.


10

- 18. A retrieval catheter for retrieving an article comprising a catheter tube portion and a tip extending axially from the catheter tube portion, the tip being flexible relative to the catheter tube portion, characterised in that the catheter includes reinforcement means to enhance the axial strength of the tip while facilitating radial expansion of the tip to accommodate an article in the tip.
- 19. A retrieval catheter as claimed in claim 18 wherein the article to be retrieved has a larger dimension then that of the normal internal dimension of the tip.
 - A catheter as claimed in any preceding claim wherein the tip is movable from a delivery configuration in which the outer diameter of the tip is approximately of the same dimension as the outer diameter of the catheter portion to which it is attached, to an expandable position as an article is received in the tip.
- 21. A catheter as claimed in any preceding claim wherein the tip is progressively movable to an expanded position in response to receiving an article in the tip.
- A catheter tube portion having a tip extending axially from the catheter tube portion, characterised in that the catheter tube portion includes reinforcement means to enhance the axial strength of the tip while facilitating radial expansion of the tip to accommodate an article in the tip.

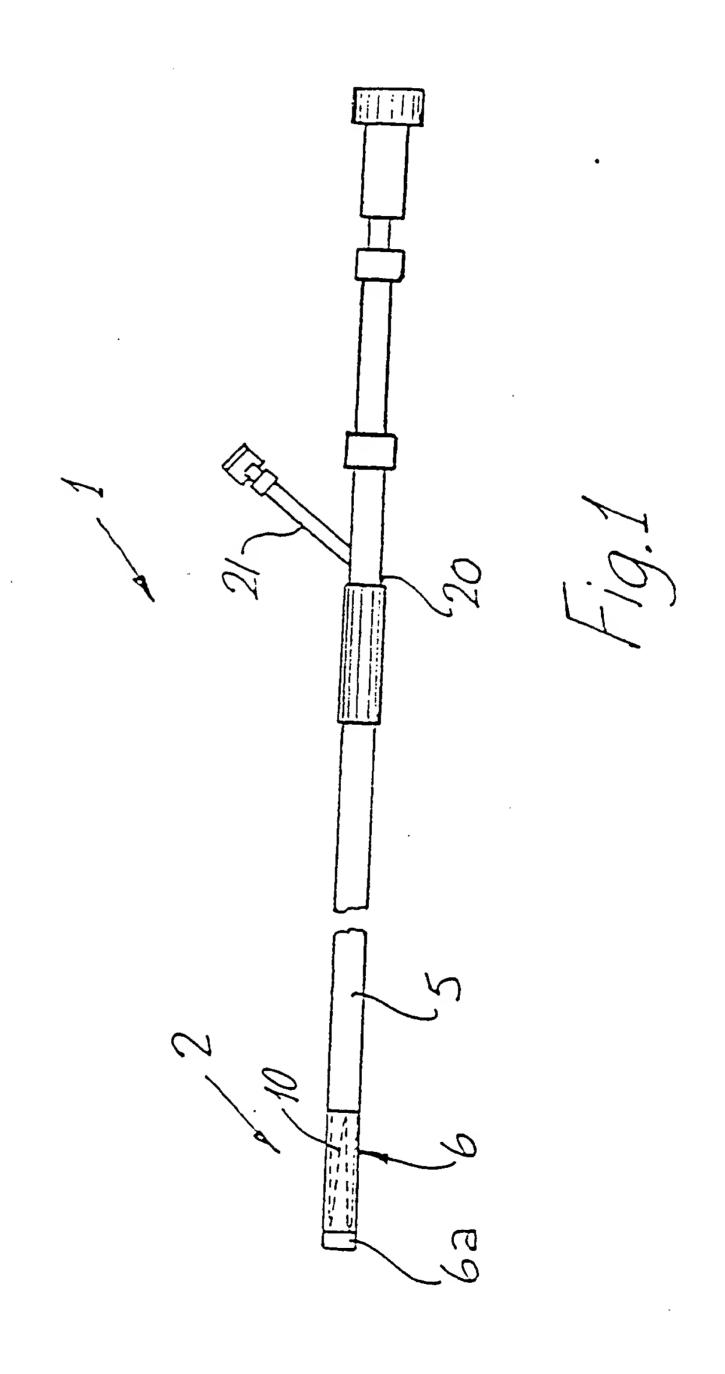


200 KMO 7044458Y5 175

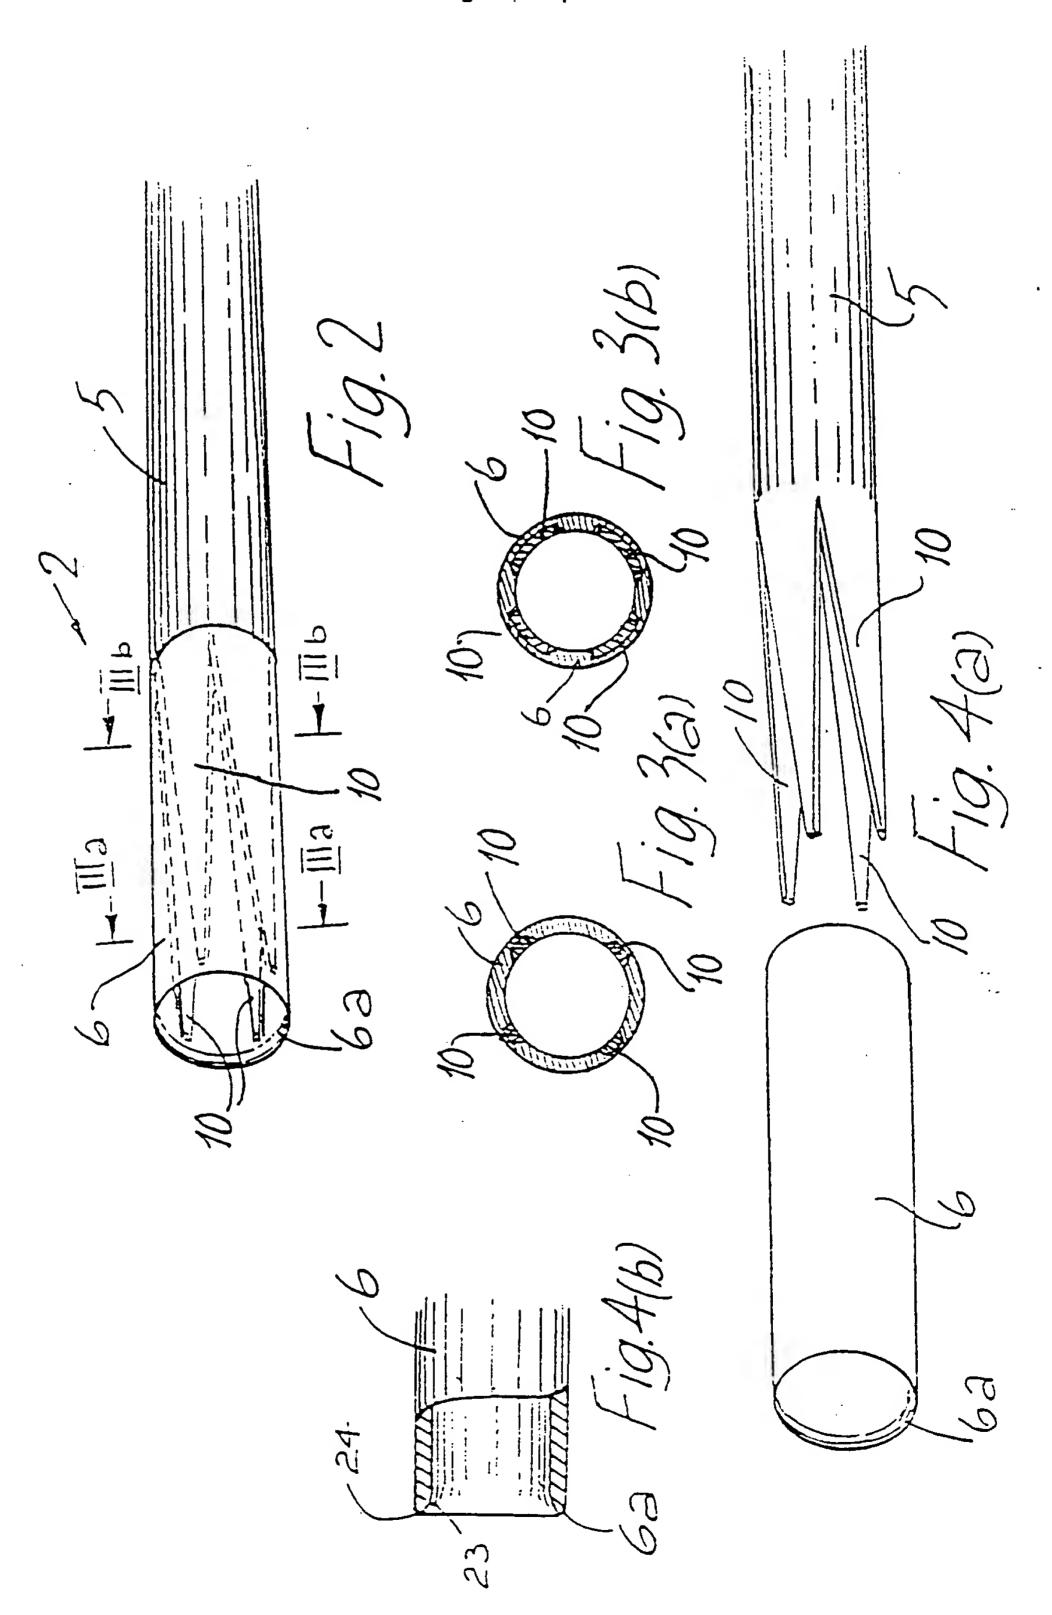

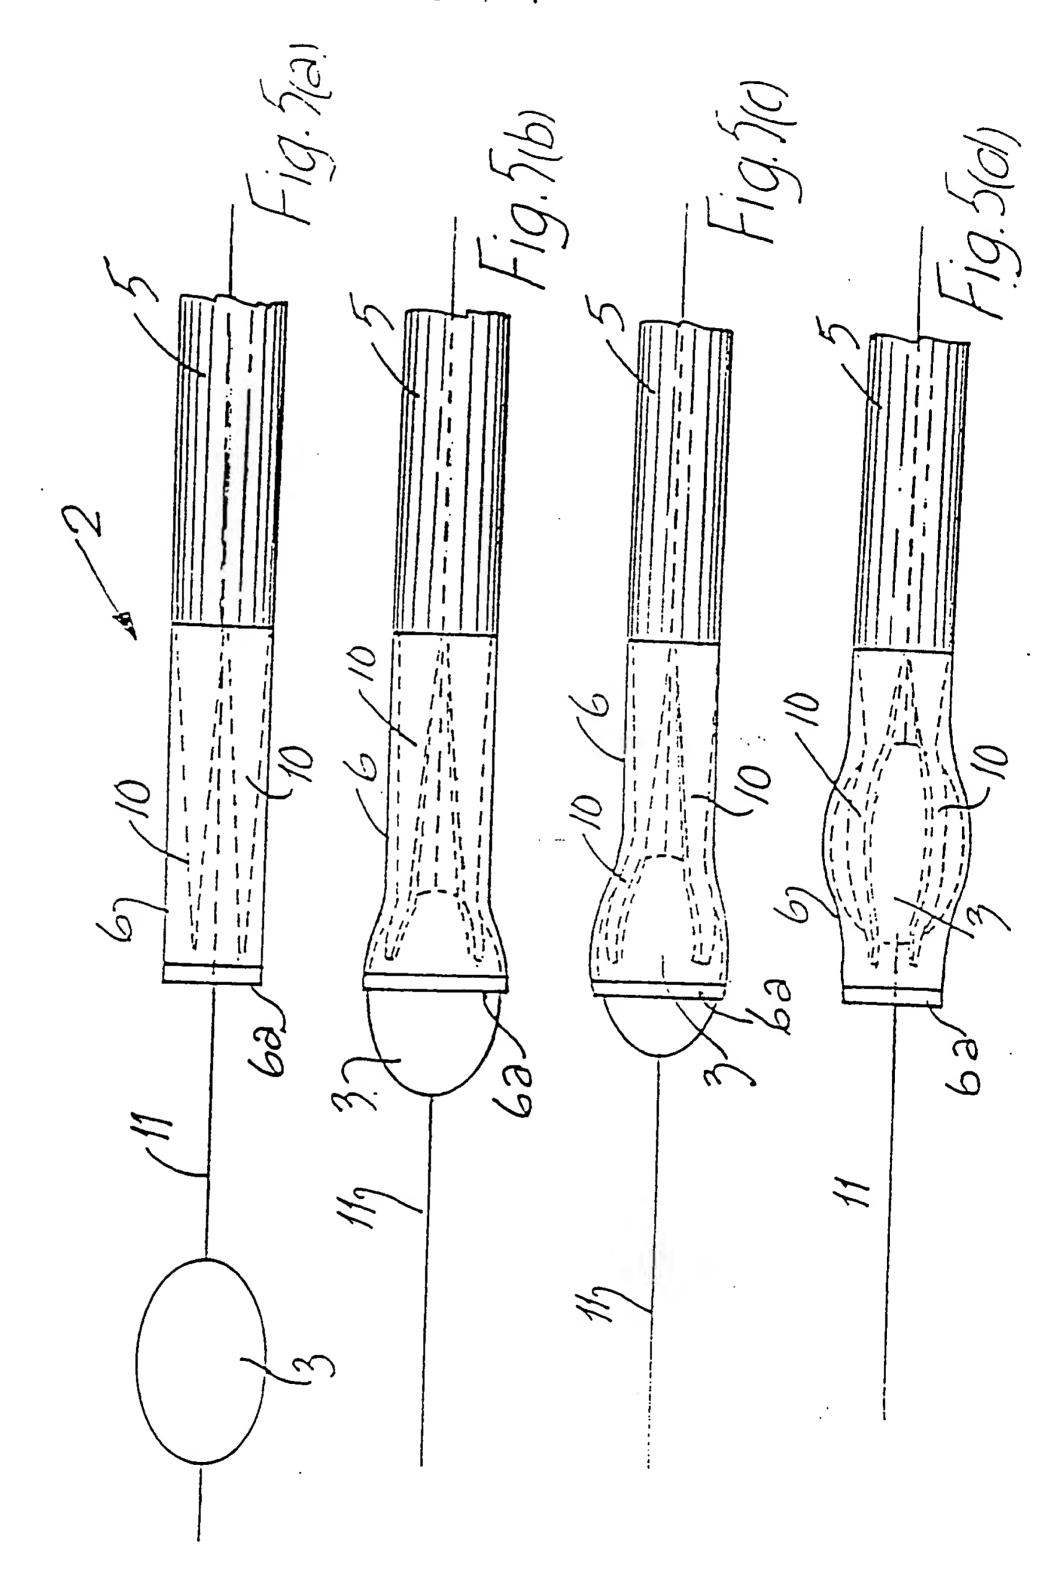

1 / 1

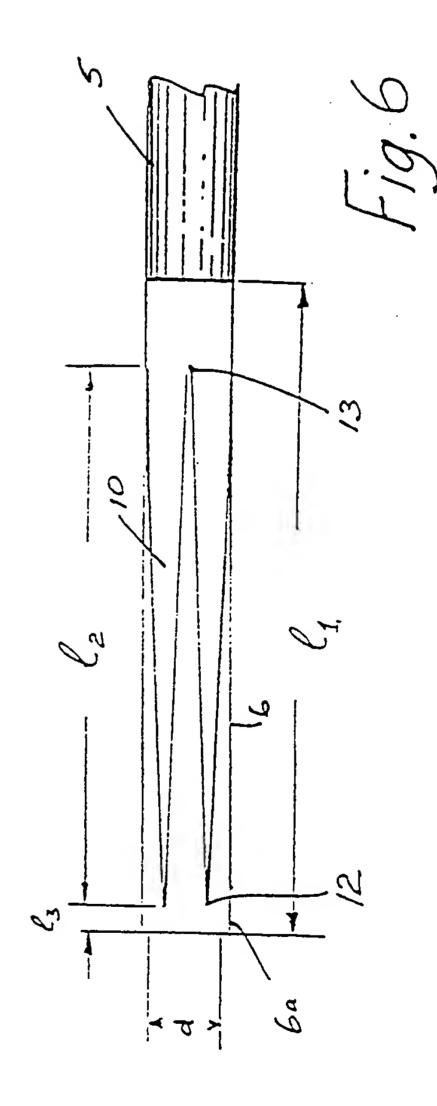

INTERNATIONAL SEARCH REPORT

PCT/IE 00/00011

A CLAS	SIFICATION OF SUB-		PCT/IE 00/00011
IPC 7	A61M25/00 A61817/22		
Accoming	'O little Tailorn Brand Co.		
ತ. ನಕ್ಕು	to International Patent Classification (IPC) or to pour national of SEARCHED	desilication and IPC	
Winimum d	locumentation seament (classification as a fin	sulcause suma	
IPC /	A61M A613 A61F		
Document			
	ation searched other than minimum documentation to the exten	l inat such documents are included	in the fleids so armed
Electronic o	1213 0000		
	tata pase consulted during the international search (name of d	ata base and, where practical, seat	ren lerms used)
	•		
C COCIAN			
Calegory -	ENTS CONSIDERED TO BE RELEVANT		
	Citation of document, with Indication, where appropriate, of t	pe relevant passages	Relevant to daim N
A	US 5 707 359 A (BUFALINI)		
	13 January 1998 (1998-01-13)		1-22
	abstract; figures 1-8		
A	US 5 312 417 A (WILK)		
	1/ May 1994 (1994-05-17)		1-22
.]	abstract; figures 1-6		
\	US 4 611 594 A (GRAYHACK ET AL)	
	10 September 1986 (1986-09-16)	- · ,	1-22
	abstract; figures 1-9		
	EP 0 743 045 A (CORDIS EUROPE)		1 22
•	20 November 1996 (1996-11-20) abstract; figures 1-5		1-22
	:Adi.e2 T_2		. [
		-/	
(Further	documents are listed in the continuation of box C.		
	price of cited documents :	X Patent family members	are listed in annex.
document a	folining the general state of the	T later document published after or profily date and not in m	W De Injumathant Allendar
	d to be of particular relevance imain but published on or after the international	or profily date and not in or orled to understand the print	or the informational filling date on the application out of the or theory underlying the
		T document of particular minus	man the second
stration or	mich may throw doubts on phonty claim(s) or led to establish the publication date of another other special reason (as specified)	involve an inventive step wh	en the document is taken along
comment w	olemng to en oral disclosure, use, exhibition or hs	carmot be considered to inve	nce; the daimed invention in evicent in evicential in the evicenti
document p	uclished shortq the international filing sale out he priority date salmed	ments, such combination be	ing abylous to a cerson skilled
	al completion of the international search	*&* document member of the sam	
		Date of mailler to start	ilonal search report
12 A	Pril 2000	19/04/2000	
Alillam Drus t	g address of the ISA	Authorized orficer	
	European Palont Office, P.B. 5515 Patentiaan 2 NL - 2280 MV Rilawiik Fol. (~31-70) 360, 3040, 5	Admonage diagar	·
Ė	Tal. (~31-70) 340-2040, Tal. 31 651 600 m. Tax: (~31-70) 340-3016	Michels, N	
ASA/210 (M	cand weel (1/14 1345)	1	

INTERNATIONAL SEARCH REPORT

International Application No.
PCT/IE 00/00011

Catedox .	Citation of cocument, with Indication, where appropriate, of the relevant passages	Relevant to daim No.
		Amerani io daim No.
A	US 5 102 415 A (GUENTHER ET AL.) 7 April 1992 (1992-04-07) abstract; figures 1-6	1-22
	• • • • • • • • • • • • • • • • • • •	
		·
	·	
	•	
ļ		
		·
		l l

INTERNATIONAL SEARCH REPORT

information on patent family members

PCT/IE 00/00011

Patent document ched in search repo	rt	Publication date				Publication date	
US 5707359	359 A 13-01-1998		NONE		Gate		
US 5312417	Α	17-05-1994	NONE	<u></u>			
US 4611594	Α	16-09-1986	NONE				
EP 0743046	Α	20-11-1996	NL NL	1000400	•	Z0-11-1996 Z0-11-1996	
US 5102415	Α	07-04-1992	DE CH	8910603 682978		07-12-1989 31-12-1993	

Form PCT/ISA-210 (parent temby annex) (July 1992)

This Page Blank (uspto)

This Page is Inserted by IFW Indexing and Scanning Operations and is not part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:
□ BLACK BORDERS
☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
FADED TEXT OR DRAWING
BLURRED OR ILLEGIBLE TEXT OR DRAWING
SKEWED/SLANTED IMAGES
COLOR OR BLACK AND WHITE PHOTOGRAPHS
GRAY SCALE DOCUMENTS
☐ LINES OR MARKS ON ORIGINAL DOCUMENT
☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)